DuraShiner® CVBR

You already know that automatic tire shining can be a huge money-maker for your wash. But now, that revenue doesn't have to carry the price of high aggravation.

The industry's only award winning tire shiner is now available with brush fill. The DuraShiner CVBR is designed for onger wear and less tear. The soft-tipped nylon brush easily conforms and accommodates all tire sizes, including the most rugged truck tires on the road today, to deliver the perfect shine every time.

We now offer the optional 108" brush length for complete tire shine coverage on the largest of the truck tires on the road today.

With the NEW *Insta-Chem* controls you will also save on chemical consumption and costs. The operator programmable *Insta-Chem* controls allows you to deliver chemical 'on demand' to the tire shine brush as the vehicle is approaching for on-time application and complete wheel coverage with every wash. With no chemical waste between tire shine services your profit stays where it belongs – in your pocket!

Available in electric or hydraulic models and our brush is compatible with water and solvent based tire dressings.

BELANGER
Inspired By You. Built By Belanger.

(248) 349-7010 | belangerinc.com

OPW
VEHICLE WASH SOLUTIONS
a DOVER company

DuraShiner® CVBR

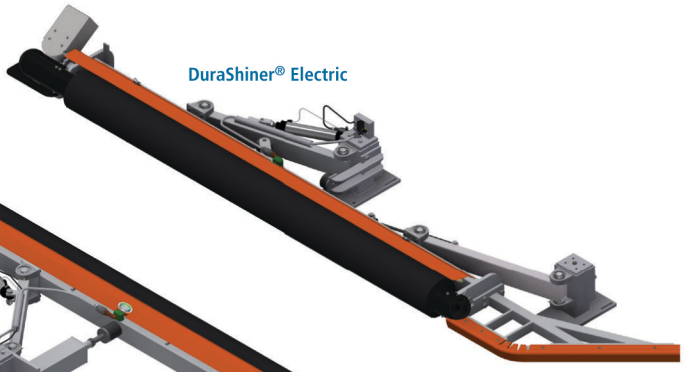

Insta-Chem Chemical Controls
Programmable chemical controls let you determine when to apply and how much to use for on-time and controlled chemical consumption.

Extended Pressure Adjustment
Adjustable pressure feature to ensure optimal brush penetration for complete coverage of tire and sidewalls.

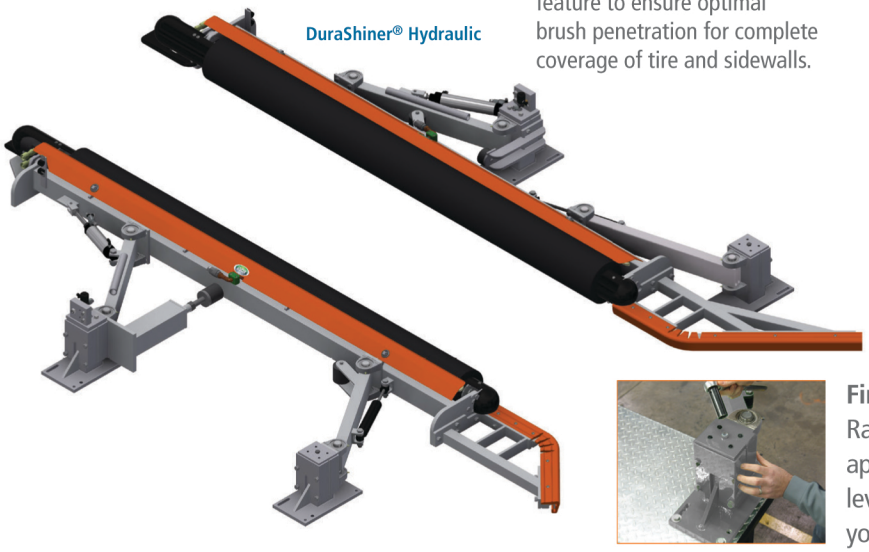

Long Lasting Nylon Brush Fill
The soft-tipped nylon brushes easily conform to all tire sizes, including the most rugged truck tires on the road today, to deliver the perfect shine every time. Available in 8′ or 9′ brush length.

Fine Tuning Leveling Bolts
Raise or lower tire shiner to adjust the applicator roller contact height, or to level machine front-to-back, simplifying your installation

REQUIREMENTS

Physical Examples

	8′	9′
Component Height	1′	1′
Minimum Tunnel Width Required	14′	14′
Minimum Tunnel Length Required	15′ 3″ Full Travel	16′ 3″ Full Travel

Utility Examples

Electrical	(1) program function 120 VAC from Controller (1) 120 VAC constant from Controller
Pneumatic	1/4″ airline @ 90 PSI minimum, 120 PSI maximum
DuraShiner® Electric Drive	Each assembly equipped with a ¾ HP, 3-phase electric motor
DuraShiner® Hydraulic Drive	Each assembly equipped with a hydraulic motor requiring 2 GPM @ 1000 PSI, 1/2" supply lines, plumbed in series

Belanger
1001 Doheny Court
P.O. Box 5470
Northville, MI 48167-5470 USA
belangerinc.com | 248-349-7010

BELANGER
Inspired by You. Built by Belanger.

PART OF
OPW VEHICLE WASH SOLUTIONS
a DOVER company

©2023 Belanger Inc. Belanger, Inc. reserves the right to revise specifications, features or designs, and to change or discontinue models at any time without notice or obligation. Prices subject to change without notice.